

# **SPECIFICATION SHEET**

Power Ratings		kW	kVA				
Power with 2 generators running in parallel	Standby	1000	1250				
	Prime	900	1125				
Amps 0.8 P.F. 3-phase (	(Volts)	3473 (208V), 3010 (240V), 1354 (480V)					
12-wire voltages: 3-Phase = 120/208, 120/240, 480/277							

#### Rating Definitions: Rated for 1800 rpm.

Standby ratings are applicable for the duration of any power outage. No overload is available at these ratings. Prime ratings are continuous per BS 5514, DIN 6271, ISO3046 & IEC 34-1. Overload capacity on prime-power ratings is 10% for one hour in each twelve hours of operation. All single phase ratings are based on a 1.0 power factor, three (3) phase ratings based on a 0.8 power factor. Ratings are established based on 85°F (29°C) and an elevation of 1,000 feet (305 meters).

#### STANDARD FEATURES OF PARALLEL DUAL INSTALLATION:

Tradewinds Power Corp (TPC) PERKINS diesel powered dual generator sets are mounted in an ISO container on a DOT trailer. Self contained standby generator packages complete with mounted auto control panel, paralleling switchgear, fuel connector, air cleaners, exhaust silencers, and other accessories mounted on a rigid base frame.

### Engine:

- 2 x PERKINS model 2806F-E18TAG1 6-cylinder EPA Tier 4 diesel engines designed to provide economic and durable operation at prime and standby duties, hitting the key power nodes required by the power generation industry.
- Flexible packaging of the 6 cylinder engines caters for the space you have available, and with mechanically operated unit fuel injectors, electronic control and carefully matched turbocharging, our 2800 range gives you performance and economy
- Its premium features provide exceptional power to weight ratio resulting in exceptional fuel consumption
- · Designed to provide excellent service access for ease of maintenance
- · High compression ratios ensure clean rapid starting in all conditions
- · Spin-on full-flow lube oil filter

### Alternator:

- 2 x Marathon 4-pole, 12-wire brushless generator, single bearing
- Superior voltage waveform achieved by a 2/3 pitch and skewed rotor.
- Vacuum-impregnated windings with fungus-resistant epoxy for dependability and long-life.
- Permanent Magnet Generator (PMG) with Voltage Regulator upgrade.
- Sustained short-circuit capability enabling down-line circuit breakers to trip without collapsing the generator field

### Starting System:

- 24-VDC Starter & Engine mounted Battery Charging Alternator
- · Automatic Battery Chargers, 10 amps.
- · Starting Battery Groups (Racks, Cables, 2-4D's).

### Enclosure and Arrangement of Complete Assembly:

- 53 ft ISO container single use weather enclosure with 4-man doors for mobile application. (4) Pad lockable doors with stainless steel hinges. Includes gas shock on each door. Doors with drip rail at each entry.
- · Access panel in enclosure side for plenum access.
- 2" matted fiberglass thermal insulation and sound absorbent material and walls covered with .032" perforated aluminum. Discharge plenum interior covered with .040" skin. Discharge bird screen protection.
- · Fixed intake louvers. Blown open gravity discharge damper.
- · Exterior drains for radiator coolant and engine oil.
- · 53' tandem axle chassis with spare tire with and hub-o-meter.
- 2000 Amp Cam Lock connection for building load.
- Non-UL sealed secondary double wall standalone fuel tank with 1200 gal usable capacity to provide 16.2 hours runtime for 2xTP500 T4.

### Generator Options:

- · Fuel transfer pump from tanker to day tank
- · Secondary water fuel separation system
- Storage for 44 x 400A rated 50' cables

# **DUAL CONTAINERIZED GENERATOR SYSTEM**



MODEL DEPICTED: Single TP500 T4 & switchgear within container

### **AUTOMATIC ENGINE CONTROLLER DGC2020:**

- · Automatic engine controller with analog display of all functions
- Microprocessor Based, Navigation key with large LCD display
- SAE J1939 CANBUS Communication
- · Event Recording
- · Transfer Switch Control (main failures)
- · Alternator Protection: under/over voltage, under/over frequency
- Engine Protection: Low oil pressure, High coolant temperature, Over speed & over crank, Sender Unit failure, Fuel Failure sensor, Battery Charger Failure
- · All protections are programmable as Alarms or Pre-alarms
- Metering (ample range): Volts, Current, Hz, Watts, VA, PF, Oil Pressure, Coolant Temperature, RPM, DC Volts, Fuel Level, Engine running time
- · Engine Control with Timers
- · External remote start input (on or off load)
- 16 programmable contact inputs 7 Contact outputs

### SCADA interface points:

- No fuel
- · Low battery charging voltage
- · Engine running
- · Common engine alarm
- Switch in Emergency Position



DGC-2020 DIGITAL CONTROLLER

# PARALLELING CONTROL & OTHER ELECTRICAL EQUIPMENT:

- Model 2020 Automatic Paralleling Control with Motorized Main Circuit Breakers cabled to Common Bus.
- · Automatic Battery Chargers, 10 amps.
- 100amp load center for battery chargers, jacket water heaters, generator strip heaters, interior lights.
- · AC & DC Lights, Duplex Receptacles, E-Stops.

### WARRANTY:

- Engine covered under the original equipment manufacturer's warranty
  consult Tradewinds Power Corp for details
- Complete package supplied with 1-year limited warranty

The manufacture reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.






# **DUAL CONTAINERIZED GENERATOR SYSTEM**

INDIVIDUAL ENGINE SPECIFICATION				
Manufacturer	Perkins			
Model	2806F-E18TAG1			
Emissions	EPA Tier 4			
Engine speed (rpm)	1800			
Nominal Engine hp 1800rpm	744			
Cyclinder arrangement	Vertical inline			
Combustion system	Direct Electronic unit injection			
Aspiration	Turbocharged air-to-air chargecooled			
Engine type	Diesel			
Diesel Fuel Grade	ASTM D975 D2			
Number of Cylinders	6			
Displacement in <sup>3</sup> (liters)	1106 (18.1)			
Bore and Stroke inches (mm)	5.7 x 5.72 (145 X 183)			
Cooling	Water-cooled			
Governor	Electronic			
Starting aids	Glow Plugs			
Compression ratio	16.0:1			
Air cleaner type	Medium duty dry type			
Exhaust Aftertreatment	DOC/DPF/SCR			
Oil Filter	Full flow with water separator			
COOLING SYSTEM FOR OPERATING AT 120° AMB	IENT:			
Total coolant capacity gals (Liter)	14.8 (56.0)			
Recommended lubricating oil grade	SAE 15W40			
Oil consumption at full load	< 0.1% of fuel consumption			
Maximum top tank temperature F°(C°)	244.6 (10.07)			
LUBRICATING SYSTEM:				
Total lubricating max. capacity quarts (Liter)	78.1 (74.0)			
Recommended lubricating oil grade	SAE 10W-30			
Oil Cooler	Integral with filter header			
Oil Filter	Full-flow replaceable filter			

ENGINE ELECTRICAL SYSTEM:	
Starting motor voltage	24 volt
Charger	85 amp alternator with DC output
Wet Cell Battery	Lead Acid
INDIVIDUAL ALTERNATOR:	
Configuration	Brushless, 12-wire, 4-pole
Frequency	60 Hz
PMG supplied Voltage regulation	+ / - 1%, V/Hz, Electronic, EMI filtered
No load to full load voltage regulation	+/- 2%.
Coupling	SAE Adapter, Flexible Disc, Direct
Bearing	Single
Manufacturer	Marathon
Model 130°C Temp. Rise	6429 Frame 480V
Load acceptance	One Step, 90% per NFPA 110
Compliance	NEMA, IEEE & ANSI for temp. rise
TIF Factor	Self ventilated drip-proof
FUEL CONSUMPTION: PER HOUR GALS (LITER	S) SETS IN PARALLEL
Standby Power	73.9 (280.2)
Prime Power	66.9 (253.4)
75%	50.0 (189.4)
50%	36.5 (138.4)
CONTROL PANEL SPECIFICATIONS:	
Manufacturer (Model)	Basler (DGC-2020)
MPC-10 Controller Inputs	16
MPC-10 Controller Outputs	12
Operating power/consumption	6-32 VDC; Average load 14.2W
Communications	UL 508 R & CSA C22.2 #14
GENERATOR OPTIONS:	
Fuel transfer pump	From tanker to day tank
Fuel filtration	Secondary water fuel separation

## **DIMENSIONS & ARRANGEMENT DRAWING CONTAINERIZED MODEL:** TPP1000

On board cable storage

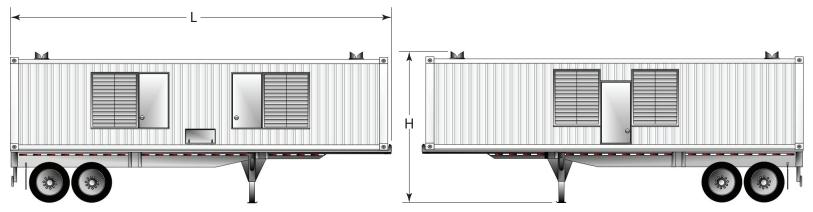

KEY DIMENSIONS inches (mm), WEIGHT pounds (kg) DAILY SERVICE MOUNTED FUEL TANK US gals (L)										
Configuration	Н	leight		Length	Width		Dry Weight lbs (kg)	Wet Weight lbs (kg)	Fuel Tank	
Containerized Trailer Mounted	Н	162 (4,115)	L	480 (12,192)	W	96 (2,438)	60,000 (27,215)	75,500 (34,246)	260 (985)	

44 off 400 A rated 50 foot cables